



WEN-18/22 ET2 NORMAL SPIN WASHER EXTRACTORS



EASY TOUCH 2

7" touch screen, user-friendly and fully programmable
Connection USB. Free software online for programming,
telemetry, data analysis...
Videos display (ads, instructions...)
37 available languages
8 dosing signals as standard.



G FACTOR

G factor 200: high G factor for low spin washers, reduced
residual moisture, reduced drying time, energy savings



EFFICIENCY

Optimized consumption: automatic or manual adjustment
of water levels and detergents according to the load
Water Saving system: 3 configurable levels of savings



VERSATILITY

OPL <> SELF-SERVICE
ELECTRIC <> HOT WATER
MAKE TO ORDER: possibility to customize
WET CLEANING as standard



CONNECTIVITY

Communication Danube Online - IoT as standard
Remote technical service
Management of laundry
Multi-payment system



ERGONOMICS

Big aluminium door ø 460 mm
Easy door lock system



MAINTENANCE

Hinged panel: easy access to parts
Same parts for all the models: electronic components,
gear, inverter, contactors
Technical menu: statistics, errors...



OTHERS

Hard mounted washers to be anchored to the floor
Stainless steel vat and drum, skinplate outer casing
3 water inlets
4 compartments detergents box
Imbalance controlled by frequency inverter
CE and WRAS certificates. ETL option.




OPTIONS

- 2 dosing pumps kit DQ-2
- Additional dosing pump DB-1
- Double drain
- SLUICE: model with 8 mm drum holes
- Anchoring base
- Normally closed valve
- AQUA FLOW bath recirculation kit
- 6 additional dosing signals
- Silicone door gasket
- Reversing door opening
- Tropicalized model (ET2)
- Steam transformation kit
- AISI-304 stainless steel outer casing or front panel
- Automatic door unlock device (in case of power failure)
- Coin kits: tokens or coins meter + box, central pay
- Other tensions

TECHNICAL DATA	UNIT.	WEN-18 ET2	WEN-22 ET2		
DRUM					
Capacity 1:9 / 1:10	kg	20/ 18	25/ 22		
Volume	l	180	220		
Diameter	mm	700	700		
Depth	mm	470	570		
GENERAL DATA					
Washing / extraction speed	r.p.m.	50 / 714	50 / 714		
G factor	-	200	200		
Maximum force transmitted	KN	2,63 ±5	3,04 ±5		
Frequency dynamic force	Hz	8,42	8,42		
Sound level	dB	<70	<70		
Self-service version	-	YES	YES		
Double drain	-	OPT	OPT		
Weighing / Tilting system	-	NO / NO	NO / NO		
Sluice option	-	YES	YES		
DOOR					
Height center / base door	mm	655 / 348	655 / 348		
Diameter	mm	460	460		
POWER					
Motor	kW	2,2	2,2		
Heating (Elec. models)	kW	12	12		
Max. elec. power (Elec. models)	kW	12,75	12,75		
Max. elec. power (steam or hot w.)	kW	2,2	2,2		
CONNECTIONS		ELECTRIC	STEAM / HOT WATER	ELECTRIC	STEAM / HOT WATER
Tension 230V - I + N + T	N° x mm2 / A	2 x 16 / 63A	2 x 4 / 32A	2 x 16 / 63A	2 x 4 / 32A
Tension 230V - III + T	N° x mm2 / A	3 x 6 / 40A	-	3 x 6 / 40A	-
Tension 400V - III + N + T	N° x mm2 / A	4 x 4 / 32A	-	4 x 4 / 32A	-
Steam inlet (steam mod.)	Inch	1/2"		1/2"	
Max. steam consumption	Kg/h	12		12	
Water inlet	Inch	3/4"		3/4"	
Water pressure	Kgs/cm ²	2-4		2-4	
Maximum water consumption*	Lit/h	120		120	
Drain	Inch	3"		3"	
Drain flow	Lit/min	200		200	
DIMENSIONS / PACKING DIMENSIONS					
Net / gross length	mm	788 / 880		788 / 880	
Net / gross depth	mm	840 / 1.040		950 / 1.140	
Net / gross height	mm	1.307 / 1.500		1.307 / 1.500	
Net / gross weight	kg	281 / 301		300 / 320	
Volume	m3	1,3		1,5	

* N°20 Program, 75% load

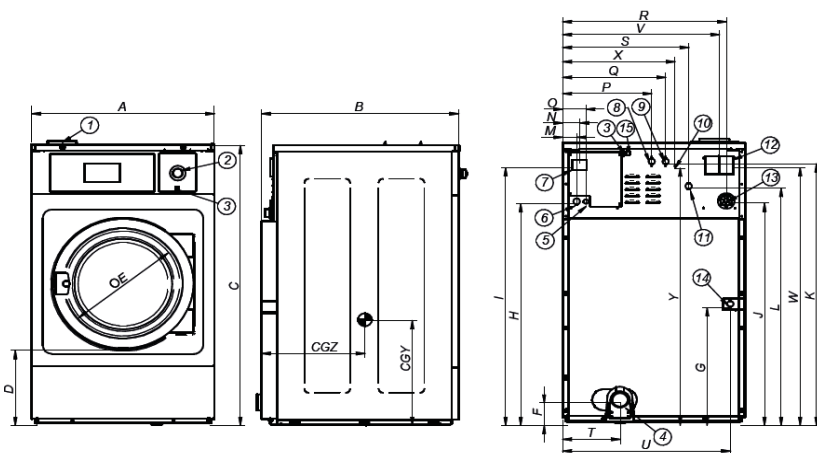

1. SOAP DISPENSER
2. EMERGENCY STOP
3. USB PORT
4. DRAIN
5. ELECTRICAL CONNECTION TO LIQUID SOAP PUMPS
6. ELECTRICAL CONNECTION
7. MAIN SWITCH
8. AUXILIAR WATER INLET
9. HOT WATER INLET
10. EQUIPOTENTIAL CONNECTION
11. COLD WATER INLET
12. BLUR OUTPUT / WATER OVERLOAD
13. LIQUID SOAP CONNECTION
14. STEAM CONNECTION
15. ETHERNET PORT

	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	CGY	CGZ
WEN-18	788	850	1.307	348	460	115	552	1.035	1.203	1.038	1.222	1.107	61	74	101	385	445	706	544	249	724	676	1.202	485	1.202	479	546
WEN-22	788	950	1.307	348	460	115	552	1.035	1.203	1.038	1.222	1.107	61	74	101	385	445	706	544	249	724	676	1.202	485	1.202	479	586

